



*Comfort-King™ offers optimal cushion and resilience for proper fatigue relief and increased productivity!*

- Comfort King™ relieves stress on knee, foot, ankle joints and pressure points resulting from standing for long periods
- Intelligent solution to increase worker productivity and motivation while reducing risk of accident
- Comfort King™ offers the added benefits of wear, slip and chemical resistance creating a safer work environment

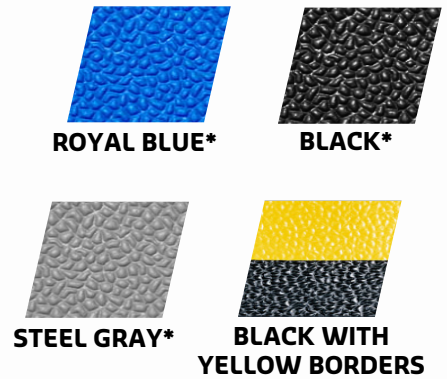
**COMFORT-KING™ APPLICATIONS**

Provide a light to medium-duty solution for dry areas e.g.: Work Station, Finishing/Assembly Station and Cashier Station





**FEATURES**

- Highly energized Zedlan™ sponge combines softness, resilience and durability for exceptional relief
- Extra bounce property stimulates muscles and blood flow to reduce fatigue
- Outwears other sponge products by nearly three to one
- Also available with anti-microbial additive (ask customer service) or with ground cord for anti-static applications

Compare Comfort-King™ to other Crown products:



\*Items with an \* ship in 24 hours

| AVAILABILITY  |  | TECHNICAL DATA  | PROFILE  |
|---|--|---|--|
| <b>MATS</b><br>2' X 3'*<br>3' X 5'*<br>3' X 12'<br>*Quick ship item | <b>ROLLS</b><br>2' X 60'<br>3' X 60'<br>4' X 60'<br>6' X 60'**<br>** Not available with yellow borders | Description: Zedlan Foam<br>Compression: .12 @ 7psi per ASTM D-1667<br>Tabor Abrasion: ≤1.5% ASTM D-4060<br>Electrical Properties: (10 <sup>9</sup> ohms per sq.) ASTM D-257<br>Weight: .76 lbs per sq. yd. | <b>Thickness: 3/8" (#440 Standard)</b><br><br><b>Thickness: 1/2" (#445 Supreme)</b><br><br>Provides 33% more comfort |
| <b>CUSTOM SIZES</b>   |  | <b>WARRANTY</b>   |  |
| Length cuts up to 60'   |  |  <b>TOTAL CONFIDENCE WARRANTY</b>  |  |
| <b>USE AND CARE</b>   |  |   |  |
| Damp mop  |  | Click or scan code for short video<br>   |  |

AUTHORIZED DISTRIBUTOR



T: 1 800 628 5463  
F: 419 332 4180  
[www.crown-mats.com](http://www.crown-mats.com)

Products and their related details are subject to change. Please contact our Customer Service department to obtain current information.